

NOTES:

1) OPERATING TEMPERATURE: -65°F to +300°F
2) FINISH: Parts shall have a smooth appearance, with no gates and all flash removed
3) DELTA SEAL P/N E309-90-014
4) U.S. & Foreign Pat. Issued & Pend.

REVISIONS					
	ECN#	REV	DESCRIPTION	DATE	INITIALS
		N/A	initial release	7/12/01	JS
		001	REVISED PER ECR 111009AZ01	2/12/10	KH

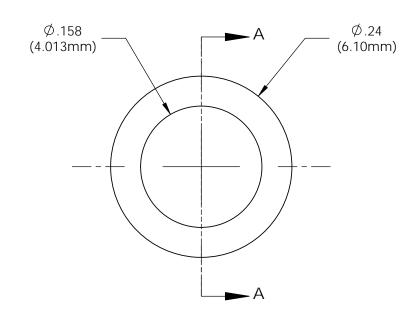



SECTION A-A



ISOMETRIC VIEW

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES: ANGLES DECIMALS .X ±.020 .XX ±.010 .XXX ±.005 FINISH BREAK ALL CORNERS AND SHARP FINISH

EDGES .030 MAX					
THIRD ANGLE PROJECTION					
PROPRIETARY AND CONFIDENTIAL					
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF					

MATERIAL ETHYLENE PROPYLENE DIENE RUBBER (EPDM) 70 DUROMETER (BLACK)

SEE NOTES

APP	DATE			
DRAWN	K.Howard	2/12/10		
CHECKED	DPZ	2/22/10		
DO NOT SCALE DRAWING				

VISUAL COMMUNICATIONS COMPANY
190 Bosstick Boulevard, Suite 101 San Marcos, CA 92069 USA
Phone (760) 560-1300 Fax (760) 560-1301 email vccsales@vcclite.com

TITLE:

LENS SPACER SPC 040

SIZE DWG. NO. REV SPC 040 E 001 SCALE: 8:1 SHEET 1 OF 1

2 5